Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

△	COUNT	REVISIONS	BY	CHKD	DATE	△	COUNT	REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

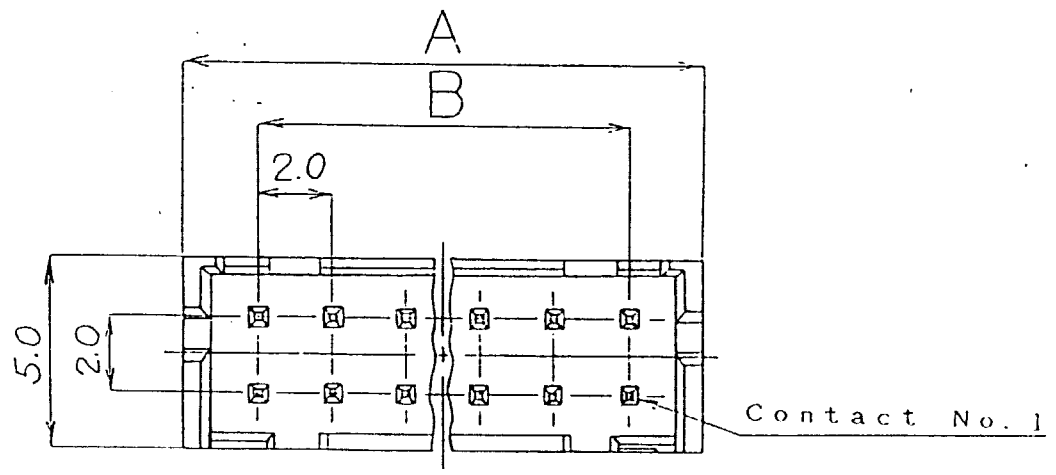

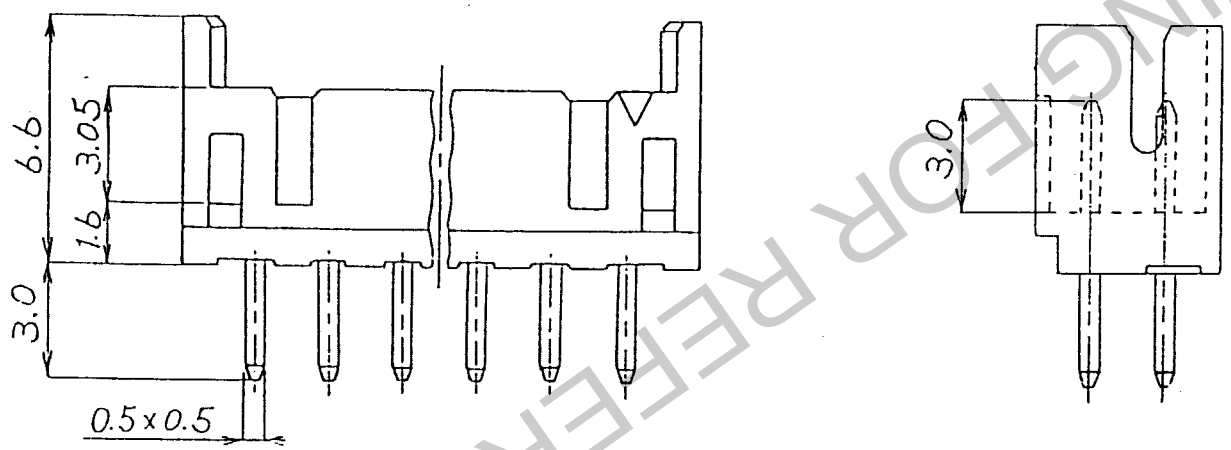

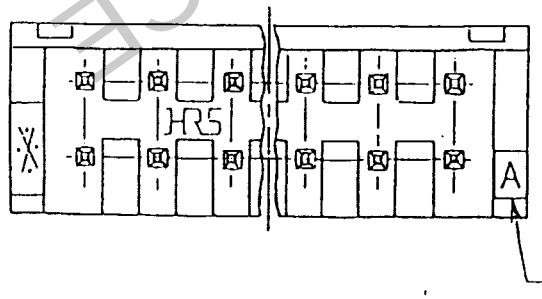

No. of Pin	Part. No.	A	B
4	DF11- 4DP-2DSA(01)	6.0	2.0
6	DF11- 6DP-2DSA(01)	8.0	4.0
8	DF11- 8DP-2DSA(01)	10.0	6.0
10	DF11-10DP-2DSA(01)	12.0	8.0
12	DF11-12DP-2DSA(01)	14.0	10.0
14	DF11-14DP-2DSA(01)	16.0	12.0
16	DF11-16DP-2DSA(01)	18.0	14.0
18	DF11-18DP-2DSA(01)	20.0	16.0
20	DF11-20DP-2DSA(01)	22.0	18.0
22	DF11-22DP-2DSA(01)	24.0	20.0
24	DF11-24DP-2DSA(01)	26.0	22.0
26	DF11-26DP-2DSA(01)	28.0	24.0
28	DF11-28DP-2DSA(01)	30.0	26.0
30	DF11-30DP-2DSA(01)	32.0	28.0
32	DF11-32DP-2DSA(01)	34.0	30.0

Notes] 1: The minimum ordering quantity for header is one package(containing 100 pieces).
2: Insulator : Nylon resin ,Black
Contact Material: Brass
Contact Plating : 0.2 μm gold plating

HRS DRAWING FOR REFERENCE

No.	MATERIAL	FINISH, REMARKS	No.	MATERIAL	FINISH, REMARKS

			GENERAL DIMENSION TOLERANCE	
APPROVED	M. Yamamoto	90.8.29	6 or less	±0.3
REVIEWED		. .	over 6 to 18	±0.5
CHECKED		. .	over 18 to 50	±0.7
DESIGNED	T. Oma	90.8.29	over 50 to 125	±1
DRAWN	T. Oma	90.8.29	over 125 to 250	±1.3
			ANGULAR	±1°

HIROSE ELECTRIC CO., LTD.

ISSUED BY

PART NO. DF11-※DP-2DSA(01)

DRAWING No. EDC3-162373-01

UNITS mm

SCALE 5 : 1

CODE NO.

FORM No.