Driver Specification Sheet



Model No: GBS-200F35CP02-04 Rev: 1

Product Line: Tymphany Last Update: 2017-04-25 14:32:09

Product Description


This 8 inch 4 ohm transducer member of the GBS family provides a very slim woofer capable of large excursion. A highly optimized ferrite motor and unique suspension layout combine to give a cost effective solution in a previously unavailable package.



Specifications

DC Resistance	Revc	Ohms	3.52	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	
Minimum Impedance	Zmin	Ohms	4.49	7.5%	Moving Mass	Mms	g	66.8
Voice Coil Inductance	Le	mH	1.81		Suspension Compliance	Cms	um/N	217
Resonant Frequency	Fs	Hz	41.8	15%	Effective Cone diameter	D	cm	16.8
Mechanical Q Factor	Qms		4.63		Effective Piston Area	Sd	cm^2	221.7
Electrical Q Factor	Qes	0.43			Effective Volume	Vas	L	15.12
Total Q Factor	Qts		0.39		Motor Force Factor	BL	Tm	12
Ratio Fs/Qts	F	Fs/Qts	106.63		Motor Efficiency Factor	ß	(T*M^2)/Ohms	40.9
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	87.05	+/- 1.0db	Voice coil former Material	VCfm		ASV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	84.5	+/- 1.0db	Voice coil inner diameter	VCd	mm	35.5
Gap Height	Gh	mm	8		Rated Noise Power	Р	W	150
Maximum Linear Excursion	Xmax	mm	5.2		Test Spectrum Bandwidth	40Hz-500Hz		
Ferrofluid Type	FF				Driver Size	Inch	8 in	
Driver Mass	Kg	2.28						

Frequency and Impedance Response

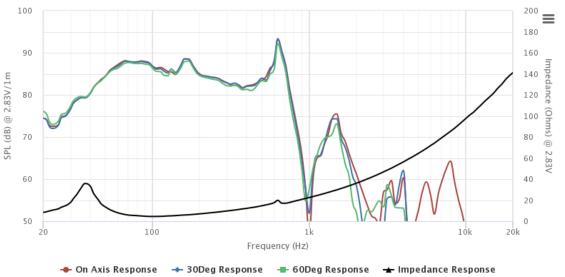

Highcharts.com

Tymphany HK LTD Address : Room 1307-8 Dominion Centre, 43-59 Queens Rd East, Wanchai, Hong Kong E-mail: sales@tymphany.com