
2-by-1 QSFP-DD Insertion Tool



Application Tooling Specification Sheet



Order No. 200214-1183

FEATURES

- Lightweight tool used in the insertion of a QSFP-DD connector in a PCB
- Inserts connector to a PCB without damage to the board


SCOPE

<u>Products</u>: Quad Small Form-factor Pluggable QSFP-DD Cage Assembly, 2-by 1 Multi-Port Connector, 2 Press Fit Rear Legs, Elastomeric Gasket for SAN Applications.

Series No.	Connector Order No.
173604	173604-0001


Notes:

- 1. See the following pages for tooling operation instructions.
- 2. These tools require a "Keep Out Zone" around the connector free of components. The rear of the connector should be .197" (5.0mm). The right and left sides should be .14" (3.5mm). See Figure 1.

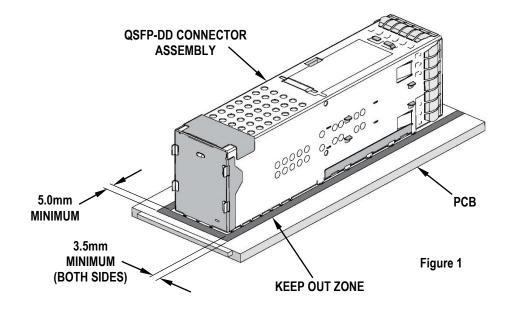


Doc. No: ATS-2002141183 Release Date: 04-14-17 UNCONTROLLED COPY Page 1 of 2

Revision: A Revision Date: 04-14-17

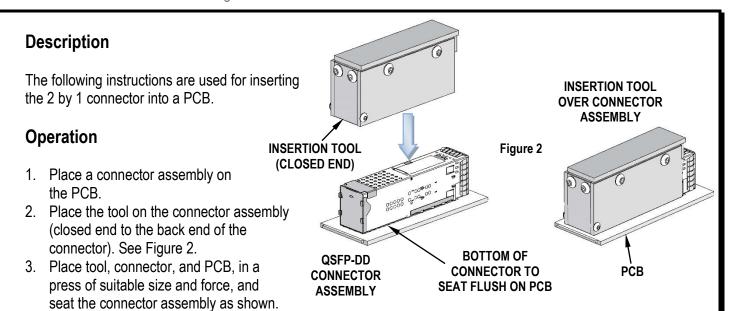

The support plate (furnished by the customer) under the PCB must have clearance for the connector pins as they pass through the PCB.

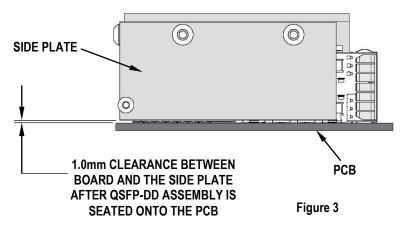

Clearance

Use this tool only with a press that has a predetermined shut height when seating a QSFP-DD assembly on a PCB. See figure 3. Allowing the press-in tool to stop on the board will result in damage the QSFP-DD cage and terminals being overseated.

CAUTION: Molex application tooling specifications are valid only when used with Molex connectors and tooling.

Application Tooling Support

Phone: +1-402-458-TOOL (8665)
E-Mail: applicationtooling@molex.com
Website: www.molex.com/applicationtooling

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.

Doc. No: ATS-2002141183 Release Date: 04-14-17 **UNCONTROLLED COPY** Page 2 of 2 Revision: A Revision Date: 04-14-17