

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



November 2009

FSUSB11 — Low-Power, Full-Speed (12Mbps) Switch

Features

- Space Saving MicroPak™ (1.6 x 2.1mm)
- USB 1.1 Signal Switching Compliant
- 3db Bandwidth: >350MHz
- Maximum 1.15Ω R_{ON} at 4.5V V_{CC} and 4Ω for 2.7V Supply
- 0.3Ω Maximum R_{ON} Flatness for +5V Supply
- Broad V_{CC} Operating Range: 1.65V to 5.5V
- Fast Turn-On and Turn-Off Time
- Break-Before-Make Enable Circuitry
- Over-Voltage Tolerant, TTL-Compatible Control Input

Description

The FSUSB11 is a high-performance, dual Single-Pole Double-Throw (SPDT) switch designed for switching USB 1.1 signals. The device features ultra-low on resistance (R_{ON}) of 1.15 Ω maximum at 4.5V V_{CC} and 4.3 Ω at 2.7V supply. High bandwidth and ultra low (R_{ON}) make this switch able to pass both USB low- and full-speed signal with minimum signal distortion. The device is fabricated with sub-micron CMOS technology to achieve fast switching speeds and designed for break-before-make operation. The select input is TTL-level compatible.

Applications

Cell Phones, PDAs, Digital Cameras, Notebook Computers

Ordering Information

Part Number	Operating Temperature Range	© Eco Status	Package	Packing Method
FSUSB11L10X	-40 to +85°C	RoHS	10-Lead, MicroPak™, JEDEC MO255,1.6 X 2.1mm	Tape and Reel
FSUSB11MTCX	-40 to +85°C	RoHS	14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide	Tape and Reel

For Fairchild's definition of Eco Status, please visit: http://www.fairchildsemi.com/company/green/rohs green.html.






Figure 1. Block Diagram

MicroPak™ is a trademark of Fairchild Semiconductor Corporation.

Pin Configuration





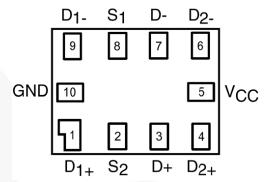


Figure 3. Micropak™ Pin Assignment (Top View)

Analog Symbol




Figure 4. Analog Symbol

Pin Descriptions

TSSOP Pin #	MicroPak™ Pin #	Pin Names	Description
1, 3, 4, 6, 9, 12	1, 3, 4, 6, 7, 9	D+, D ₁₊ , D-, D ₁ -, D ₂₋ , D ₂ +	Data Ports
2, 5	10	GND	Ground
7, 8		NC	No Connect
10, 13	2, 8	S ₁ , S ₂	Control Input
11, 14	5	V _{CC}	Supply Voltage

Truth Table

Control Inputs	Function
Low Logic Level	D ₁ Connected to D+/D-
High Logic Level	D ₂ Connected to D+/D-

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Min.	Max.	Unit
V _{CC}	Supply Voltage	-0.5	6.0	V
Vs	Switch Voltage	-0.5	V _{CC} + 0.5	V
V_{IN}	Input Voltage ⁽¹⁾	-0.5	6.0	V
I _{IK}	Input Diode Current	-50		mA
I _{SW}	Switch Current		200	mA
I _{SWPEAK}	Peak Switch Current (Pulsed at 1ms Duration, <10% Duty Cycle)		400	mA
T _{STG}	Storage Temperature Range	-65	+150	°C
T_J	Maximum Junction Temperature		+150	°C
TL	Lead Temperature (Soldering, 10 Seconds)		+260	°C
ESD	Human Body Model, JESD22-A114		8	kV

Note

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Max.	Unit
V _{CC}	Power Supply	1.65	5.50	V
V _{IN}	Control Input Voltage ⁽²⁾	0	V_{CC}	V _{CC}
V _{SW}	V _{SW} Switch Input Voltage		V_{CC}	V _{CC}
T _A	Operating Temperature	-40	+85	°C

Note:

2. Unused inputs must be held HIGH or LOW. They may not float.

The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

DC Electrical Characteristics

Unless otherwise specified, typical values are at +25°C.

Symbol	Symbol Parameter		Conditions	V	_{cc} (V)	Т	_A =+25	°C		40 to 5°C	Units
						Min.	Тур.	Max.	Min.	Max.	
VIH	Input Voltage High			2.	7 to 3.6				2.0		V
VIH	Input Voltage High			4.	5 to 5.5				4.0		V
VIL	Input Voltage Low			2.	7 to 3.6						\
VIL	input voltage Low			4.	5 to 5.5						V
I _{IN}	Control Input Leaka	ane	V _{IN} =0V to V _{CC}	2.	7 to 3.6						μA
IIN	Control Input Leake	.gc	VIN-OV 10 VCC	4.	5 to 5.5						μπ
I _{NO(OFF)} , I _{NO(OFF)}	Off-Leakage Currer D ₁ and D ₂	nt of Port	A=1V, 4.5V, B ₀ or B ₁ =1V, 4.5V		5.5	-50		50	-100	100	nA
I _{A(ON)}	On-Leakage Currer Port D	nt of	A=1V, 4.5V, B ₀ or B ₁ =1V, 4.5V or Floating		5.5	50		50	-100	100	nA
	Switch On	Micropak	I _{OUT} = 100mA, D ₁ or D ₂ =1.5V		2.7		2.60	4.00		4.30	
R _{ON}		Switch On	I _{OUT} = 100mA, D ₁ or D ₂ =3.5V		4.5		0.95	1.15		1.30	Ω
NON	Resistance ⁽³⁾	TSSOP	I _{OUT} = 100mA, D ₁ or D ₂ =1.5V		2.7		2.80			4.50	22
		1330F	I _{OUT} = 100mA, D ₁ or D ₂ =3.5V		4.5		1.50			3.00	
	On Resistance	Micropak	I _{оит} = 100mA.				0.06	0.12		0.15	
ΔR_{ON}	Matching Between Channel (4)	TSSOP	D ₁ or D ₂ =3.5V		4.5		0.07			0.30	Ω
D	On Resistance Flatness ⁽⁵⁾		I _{OUT} =100mA, D ₁ or D ₂ =0V, 0.75V, 1.5V		2.7		1.4				
R _{FLAT(ON)}	On Resistance Flat	iiess	I _{OUT} =100mA, B ₀ or B ₁ =0V, 1V, 2V		4.5		0.2	0.3		0.4	Ω
Icc	Quiescent Supply C	Current	V _{IN} =0V or V _{CC} ,		3.6		0.1	0.5		1.0	μA
ICC	Quiescent Supply C	Juilell	I _{OUT} =0		5.5		0.1	0.5		1.0	μΛ

- 3. On resistance is determined by the voltage drop between D and Dn pins at the indicated current through the
- $\Delta R_{\text{ON}} = R_{\text{ONmax}}$ R_{ONmin} measured at identical V_{CC} , temperature, and voltage. Flatness is defined as the difference between the maximum and minimum value of on resistance over the specified range of conditions.

AC Electrical Characteristics

Unless otherwise specified, typical values are at +25°C.

Symbol	Parameter	Conditions	V _{cc} (V)	7	Γ _A =+25	°C		40 to 5°C	Units	Figure
				Min.	Тур.	Max.	Min.	Max.		_
	Turn-on Time	D_1 or D_2 =1.5V, R_L =50 Ω , C_L =35pF	2.7 to 3.6			50		60	20	Figure 5
t _{ON}	S-to-Bus B	D_1 or D_2 =3.0V, R_L =50 Ω , C_L =35pF	4.5 to 5.5			35		30	ns	rigule 5
	Turn-off Time	D_1 or D_2 =1.5V, R_L =50 Ω , C_L =35pF	2.7 to 3.6			20		20	20	
LOFF	toff S-to-Bus B	D_1 or D_2 =3.0V, R_L =50 Ω , C_L =35pF	4.5 to 5.5			15			ns	Figure 5
tanu	. Break-Before-Make	D_1 or D_2 =1.5V, R_L =50 Ω , C_L =35pF	2.7 to 3.6				1		- ns	Figure 6
t _{ввм}	Time	D_1 or D_2 =3.0V, R_L =50 Ω , C_L =35pF	4.5 to 5.5		20		1			
		C _L =1.0nF,	2.7 to 3.6		20					Fi 0
Q	Charge Injection	V_{GEN} =0V, R_{GEN} =0 Ω	4.5 to 5.5		10				pC	Figure 8
O _{IRR}	Off Isolation	$f=1MHz$, $R_L=50Ω$	2.7 to 3.6		-70				dB	Figure 7
OIKK	on isolation	1 11/11/12, 11[-5052	4.5 to 5.5		-70				QD.	- iguic i
X _{TALK}	Non-Adjacent	f=1MHz, R_L =50 Ω	2.7 to 3.6		-75				dB	Figure 7
ZIALK	Channel Crosstalk	1 11VII 12, 1\[-3052	4.5 to 5.5		-75				QD.	
BW	-3dB Bandwidth	R _L =50Ω	2.7 to 3.6		350				MHz	Figure 10
	535 Barrawian	0022	4.5 to 5.5		350				111112	. 19470 10

USB Related AC Electrical Characteristics


Unless otherwise specified, typical values are at 25°C.

Cumbal	Doromotor	Conditions	V 00	T _A =+25°C			Unita	Figure .
Symbol	Parameter	Conditions	V _{CC} (V)	Min.	Тур.	Max.	Units	Figure
	Skow	R _S =39, C _L =50pF, t _R =t _F =12ns	2.7 to 3.6		0.15		no	Figure 11
LSK(O)	t _{SK(O)} Skew	at 12Mbps	4.5 to 5.5		0.15		ns	
+	Rising/Fall Time	(Duty Cyclo=50%)	2.7 to 3.6		30		- ps	Figure 12
USK(P)	t _{SK(P)} Mismatch	(Duty Cycle=50%)	4.5 to 5.5		20			
т.	Total Jitter	R _S =39, C _L =50pF, t _R =t _F =12ns at	2.7 to 3.6		1.7		20	Figure 12
T _J Total Jitter	Total Jillei	Rs=39, C_L =50pF, t_R = t_F =12ns at 12Mbps (PRBS= 2^{15} 1)	4.5 to 5.5		1.6		ps	Figure 12

Capacitance

	_ ,		.,	T _A =+25°C				
Symbol	Parameter	Conditions	V _{CC} (V)	V _{CC} (V) Min.		Max.	Units	Figure
C _{IN}	Control Pin Input Capacitance	f=1MHz	0.0		3.5		pF	Figure 9
C _{OFF}	D _n Port Off Capacitance	f=1MHz	4.5		12.0		pF	Figure 9
Con	D Port On Capacitance	f=1MHz	4.5		40.0		pF	Figure 9

AC Loadings and Waveforms

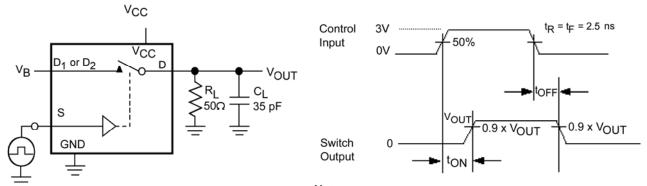


Note:

6. CL includes fixture and stray capacitance.

Note:

Logic input waveforms inverted for switches that have the opposite logic sense.

Figure 5. Turn On/ Turn Off Timing

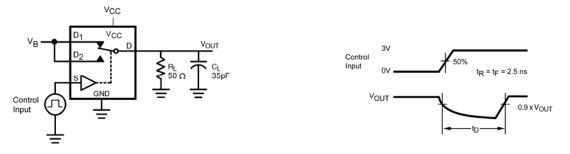

Note:

8. C_L includes fixture and stray capacitance.

Figure 6. Break-Before-Make Timing

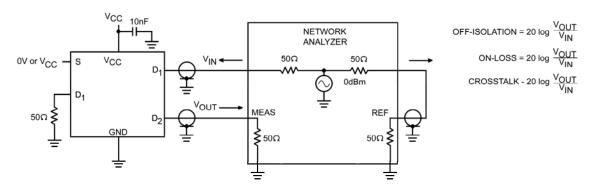


Figure 7. Off Isolation and Crosstalk

AC Loadings and Waveforms (Continued)

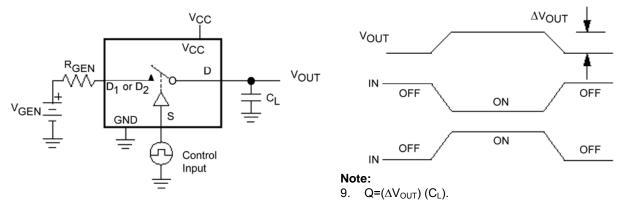


Figure 8. Charge Injection

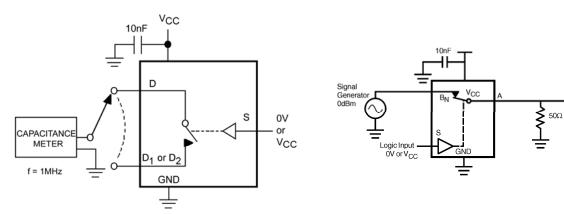


Figure 9. On/Off Capacitance Measurement Setup

Figure 10. Bandwidth

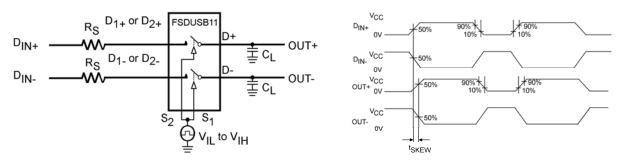


Figure 11. Skew Test




Figure 12. Rise/Fall Time Mismatch Test

Physical Dimensions

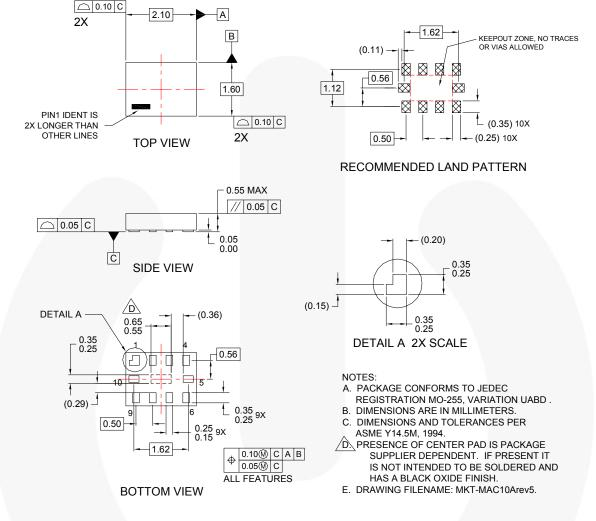


Figure 13. 10-Lead, MicroPak™, JEDEC MO255,1.6 X 2.1mm

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: http://www.fairchildsemi.com/packaging/.

Tape and Reel Specification

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications: http://www.fairchildsemi.com/products/logic/pdf/micropak_tr.pdf.

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
	Leader (Start End)	125 (Typical)	Empty	Sealed
L10X	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed

Physical Dimensions

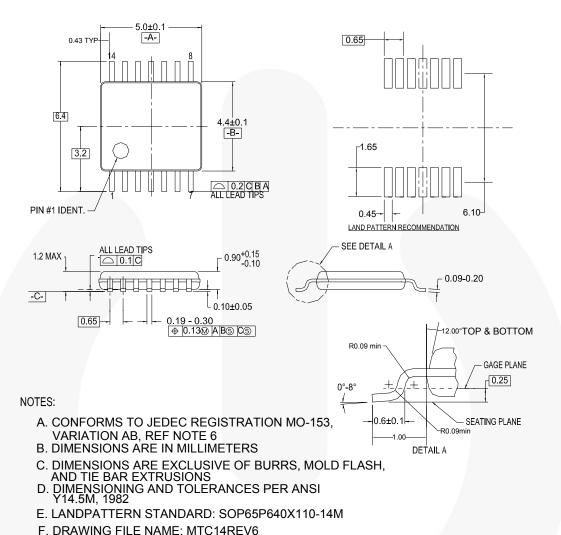


Figure 14. 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: http://www.fairchildsemi.com/packaging/





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™
Auto-SPM™
Build it Now™
CorePLUS™
CorePOWER™
CROSSVOLT™
CTL™

CTL™
Current Transfer Logic™
EcoSPARK®
EfficientMax™
EZSWTCH™®

EZ ***
DEUXPEED**

F**

Fairchild[®]
Fairchild Semiconductor[®]
FACT Quiet Series[™]
FACT[®]
FAST[®]

FAST® FastvCore™ FETBench™ FlashWriter®*
FPS™
F-PFS™
FRFET®

Global Power ResourcesM Green FPS™

Green FPS™ e-Series™ Gmax™

GTOTM
IntelliMAXTM
ISOPLANARTM
MegaBuckTM
MICROCOUPLERTM
MicroFETTM
MicroFETTM

MicroPak™ MillerDrive™ MotionMax™ Motion-SPM™ OPTOLOGIC® OPTOPLANAR®

PDP SPM™

Power-SPM™ PowerTrench® PowerXS™

Programmable Active Droop™

QFET®

Quiet Series™ RapidConfigure™

Отм

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™
SMART START™
SPM®
STEALTH™
SuperFET™
SuperSOT™.3
SuperSOT™.6
SuperSOT™.8
SuperSOT™.8
SuperSOT™.8

SupreMOS™ SyncFET™ Sync-Lock™ SYSTEM ®*
GENERAL
The Power Franchise®

p wer franchise TinyBoost™ TinyBuck™

TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPVM™
TinyVire™
Tirsault Detect™
TRUECURRENT™
µSerDes™

SerDes
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
XS™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data, supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 143

^{*} Trademarks of System General Corporation, used under license by Fairchild Semiconductor

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative